




### PREVENTS THE FORMATION OF ICE DAMS

Calorique's *PerfectlyClear<sup>TM</sup> Roof De-ice* is the most advanced ice dam prevention solution on the market today. Our unique heating panels feature a thin profile. When installed, they are completely concealed underneath the asphalt shingle. The heating panels are available in various standard lengths to provide for any configuration.

The modular design allows the roofing contractor to easily plug heating panels together positioning them in and around problem areas. The panels are easily installed as a "Retro Fit" under existing shingles, or at New Shingle Installation. Our products provide ice dam prevention for valleys too.

Installation is easy – By removing the underside release liner and firmly pressing down, the heating panel locks securely in place. Removing the top release liner strip, seals the panel to the next course of shingles. Simple, fast and easy!

*PerfectlyClear*<sup>™</sup> *Roof De-Ice* combined with *PerfectlyClear*<sup>™</sup> *Gutter and Downspout Heat Ribbons* plus an optional automated controller/snow sensor, protects buildings against dangerous ice build-up – safely and efficiently.

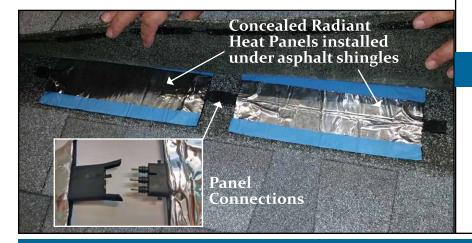

### **ROOF De-Ice**

### **FEATURES**

- Prevents Ice Dams
- For New and Existing Roofs
- Completely concealed under shingle
- No Nailing Required
- ETL Intertek Listed
- 15 Year Limited Warranty
- Certified to withstand 110 MPH winds
- Completely Waterproof
- Easy to install
- 120V and 240V
- 10 Watts per linear foot
- Maintenance free

### **SPECIFICATIONS**

Thickness: <0.150"</li>

• Flammability Rating: 5VA (UL94)

• Weight: 7oz/ft.

• In compliance with UL499, ETL Listed

## Calorique 800-922-9276





# **ROOF De-Ice** installation

### 120 Volt Product

PRODUCT #	WIDTH	LENGTH	WATTS	AMPS
PCR5-28W120V	5"	3	28.07	0.24
PCR5-38W120V	5"	4'	38.07	0.32
PCR5-48W120V	5"	5'	48.07	0.41
PCR5-98W120V	5"	10'	98.07	0.82
PCR5-198W120V	5"	20'	198.07	1.66
PCR5-248W120V	5"	25'	248.07	2.07
PCRV10-69W120V	10"	3'	69.0	0.58
PCRV10-113W120V	10"	5'	113.27	0.95
PCRV10-233W120V	10"	10'	233.04	1.95



PRODUCT #	WIDTH	LENGTH	WATTS	AMPS
PCR5-28W240V	5"	3'	28.07	0.12
PCR5-38W240V	5"	4'	38.07	0.16
PCR5-48W240V	5"	5'	48.07	0.20
PCR5-98W240V	5"	10'	98.07	0.41
PCR5-198W240V	5"	20'	198.07	0.83
PCR5-248W240V	5"	25'	248.07	1.04
PCRV10-69W240V	10"	3'	69.0	0.29
PCRV10-113W240V	10"	5'	113.27	0.48
PCRV10-229W240V	10"	10'	228.8	0.96

#### PerfectlyClear™ Accessories

Power Cord - Single	COR-8		
Power Cord- Double	COR-9		
Power Cord- Triple	COR-12		
Single Jumper 6"	COR 4030-Jumper-S-6		
Single Jumper 12"	COR-4030-Jumper-S		
Double Jumper 12"	COR-4030-Jumper-D		
Single Jumper 18"	COR-4030-Jumper-S-18		
Single Jumper 5 feet	COR-4030-Jumper-S-5		
Single Jumper 10 feet	COR-4030-Jumper-S-10		
Single Jumper 15 feet	COR-4030-Jumper-S-15		
OJ Controller including sensors	ET02-4550 PCR		









